

FISHER, CHRISTEN & SABOL

ATTORNEYS AT LAW
INTELLECTUAL PROPERTY LAW
SUITE 14011725 K STREET, N. W.
WASHINGTON, D. C. 20006

TELEPHONE: (202) 659-2000

FAX: (202) 659-2015

(202) 659-3951

FCSabol@aol.com

EUGENE SABOL
(1950-1960)ARNOLD B. CHRISTEN
(1942-1960)MARTIN T. FISHER
(1914-1964)VIRGIL H. MARSH
KARA M. ARMSTRONG

COUNSEL TO THE FIRM:

PAUL GRANDINETTI

JAMES L. LEWIS

M. M. BARRAN

02/17/00

Jc675 U.S. PTO
09/505713
02/17/00

February 17, 2000

Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

Enclosed is a patent application, together with other papers as indicated, for filing
in the Patent and Trademark Office as follows:**INVENTOR**

Wilfried JUD

Hans-Rudolf NÄGELI

TITLE

STERILISABLE COMPOSITE FILM

- (X) Declaration, Power of Attorney and Petition
 (X) Assignment
 (X) Drawing(s) 2 sheet(s) (X) formal () informal
 (X) Other: Claim for Priority with Certified Copy of Application (Swiss No. 1999
 1114/99)
 (X) Preliminary Amendment
 (X) Our check for \$800.00 to cover the fees calculated as follows:

Basic filing fee	\$	760.00
Total claims in excess of 20 (0) x \$22.00	\$	-
Total independent claims minus 3 (0) x \$78.00	\$	-
Multiple dependent claims - per application \$250.00	\$	-
Cost of recording assignment(s)	\$	40.00
TOTAL FEE		<u>\$800.00</u>

When applicable, please record the assignment and return to the undersigned.

If any discrepancies, please charge our Deposit Account No. 06-1110.

Respectfully submitted,

FISHER, CHRISTEN & SABOL

By *Kara M. Armstrong*

Kara M. Armstrong, Reg. No. 36,234

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Docket: ATM-2244

Applicant : Wilfried JUD et al.
Serial No. : Not yet assigned
Filed : 02/16/2000
Mark : STERILISIBLE COMPOSITE FILM

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

Please amend this application as follows:

IN THE CLAIMS:

Cancel Claims 1 to 14, and insert therefor:

-- 15. A sterilizable composite film containing a barrier layer that is impermeable to water vapor and gases in the form of a metal foil, and on both sides of the barrier layer at least one functional layer, the composite film has a layer structure containing one on top of the other:

- (a) a first functional layer containing a plastic film of the polyester, polyamide or polyolefin type or an extrusion layer of polyolefins or one or more lacquer layers or print and lacquer layers or print layers, and
- (b) a metal foil, and

- (c) a second functional layer in the form of a plastic film of the coextrusion coated, coextruded and/or extrusion laminated polyamide/polypropylene film type.

16. The sterilizable composite film according to Claim 15, wherein the plastic layer, layer (c), has a layer arrangement comprising coextrusion coated, coextruded and/or extrusion laminated bonding agent/polyamide/bonding agent/polypropylene, where layer (c) lies over the free surface of the first layer of bonding agent on the metal foil, layer (b).

17. The sterilizable composite film according to Claim 16, wherein the plastic layer, layer (c), has a layer type structure with one layer superimposed over the other, comprising coextruded bonded agent and polyamide and extruded bonding agent and laminate bonded polypropylene film, whereby layer (c) lies on the free side of the coextruded bonding agent layer on the metal foil, layer (b).

18. The sterilizable composite film according to Claim 15, wherein the plastic layer, layer (c), has a layer type structure with one layer superimposed over the other, comprising laminate adhesive and laminate bonded a polyamide/bonding agent/polypropylene film, whereby the laminate adhesive layer lies on the metal foil, layer (b).

19. The sterilizable composite film according to Claim 16, wherein the plastic layer, layer (c), has a layer type structure with one layer superimposed

over the other, comprising bonding agent, laminated bonded polyamide film, extruded bonding agent and laminate bonded polypropylene film, whereby the first extruded bonding agent layer lies on the metal foil, layer (b).

20. The sterilizable composite film according to Claim 16, wherein the plastic layer, layer (c), has a layer type structure with one layer superimposed over the other, comprising coextrusion coated bonding agent, polyamide, bonding agent and polypropylene, whereby the first bonding agent lies on the metal foil, layer (b).

21. The sterilizable composite film according to Claim 16, wherein the plastic layer, layer (c), has a layer type structure with one layer superimposed over the other, comprising coextrusion, coextruded and/or extrusion laminated bonding agent with a thickness of 3 to 15 μm /polyamide with a thickness of 10 to 40 μm /bonding agent with a thickness of 3 to 15 μm /polypropylene with a thickness of 30 to 70 μm .

22. The sterilizable composite film according to Claim 15, wherein the composite film has a layer type structure containing in sequence:

- (a) a first functional layer containing a plastic film of the polyester, polyamide or polyolefin type or an extrusion layer of polyolefins or one or more lacquer layers or print and lacquer layers or print layers, and
- (b) a metal foil, and

- (c) a plastic layer having a layer type of structure comprising
coextrusion coated, coextruded and/or extrusion laminated
polypropylene/polyamide/polypropylene.

23. The sterilizable composite film according to Claim 21, wherein layer
(c) is a plastic film having a layer type structure comprising coextrusion coated,
coextruded and/or extrusion laminated polypropylene/bonding
agent/polyamide/bonding agent/polypropylene.

24. The sterilizable composite film according to Claim 21, wherein the
plastic layer, layer (c), has a layer type structure with one layer superimposed
over the other, comprising laminate adhesive and laminate bonded a film of
polypropylene/bonding agent/polyamide/bonding agent/polypropylene, whereby
layer (c) lies on the laminate adhesive layer on the metal foil, layer (b).

25. The sterilizable composite film according to Claim 15, wherein the
plastic layer, layer (c), has a layer type structure with one layer superimposed
over the other, comprising coextrusion coated polypropylene, bonding agent,
polyamide, bonding agent and polypropylene, whereby the first polypropylene
layer lies on the metal foil, layer (b).

26. The sterilizable composite film according to Claim 15, wherein layer
(c) is a plastic layer with a layer structure of coextrusion coated or coextruded
and/or extrusion laminated polypropylene with a thickness of 10 to 20
 μm /bonding agent with a thickness of 3 to 15 μm /polyamide with a thickness of

10 to 40 μm /bonding agent with a thickness of 3 to 15 μm /propylene with a thickness of 30 to 70 μm .

27. The sterilizable composite film according to Claim 15, wherein between the plastic layer, layer (c), and the metal foil, layer (b), a laminate adhesive is provided in an amount from 0.5 to 10 g/m^2 , or a bonding agent with a thickness of 0.5 to 15 μm .

28. The sterilizable composite film according to Claim 26, wherein the laminate adhesive is provided in an amount of 0.5 to 10 g/m^2 , or the bonding agent has a thickness of 3 to 15 μm .

29. A pouch type of packaging made from a sterilizable composite film according to Claim 15.

30. A method comprising making the sterilizable composite film of Claim 15.

31. A method comprising making the pouch type of packaging of Claim 28. --

IN THE TITLE:

Cancel the Title and insert therefor:

-- STERILIZABLE COMPOSITE FILM --.

IN THE ABSTRACT:

Cancel the Abstract and insert therefor the new Abstract (submitted on a separate page attached hereto).

IN THE SPECIFICATION:

On page 1, between the Title and the first line, insert:

-- Background Of The Invention

1. Field Of The Invention --.

On page 1, line 7, insert:

-- 2. Background Art --.

On page 1, line 25, insert:

-- Broad Description Of The Invention --.

On page 2, line 3, insert:

-- Detailed Description Of The Invention --.

On page 11, line 26, insert:

-- Brief Description Of The Invention

In the drawings: --

On page 11, line 29, insert:

-- Detailed Description Of The Drawings --.

On page 13, before the first line, insert:


-- What Is Claimed Is: --.

REMARKS

Please enter this preliminary amendment before calculating the filing fee.

The claims, title and abstract have been rewritten, and headings have been inserted into the specification.

Respectfully submitted,



Kara M. Armstrong
Reg. No. 38,234

Fisher, Christen & Sabol
Suite 1401
1725 K Street, N.W.
Washington, D.C. 20006
Tel.: (202) 659-2000

February 16, 2000

ABSTRACT OF THE DISCLOSURE

Sterilizable composite film for manufacturing pouch type forms of packaging and the like for, e.g., liquid, pasty or solid foodstuffs. The sterilizable composite films contain a barrier layer that is impermeable to water vapor and gases in the form of a metal foil. On both sides of the barrier layer is at least one functional layer. The following layers are arranged on top of each other in the composite film:

- (a) a first functional layer containing a plastic film of the polyamide or polyolefin type or an extrusion layer of polyolefins or one or more lacquer layers or print and lacquer layers or print layers, and
- (b) a metal foil, and
- (c) a second functional layer in the form of a plastic film of coextrusion coated, coextruded or extrusion laminated polyamide/polypropylene type layers, such as, a film containing polyamide/polypropylene layers or containing polypropylene/polyamide/polypropylene layers.

Sterilisable Composite Film

The present invention relates to a sterilisable composite film containing a barrier layer that is impermeable for water vapour and gases, comprising a metal foil and on both sides of the barrier layer at least one functional layer; the invention also embraces the use of the composite film.

Known are sterilisable composite films, e.g. those employed in the manufacture of pouches for packaging foodstuffs for human and animal consumption. For example composites of plastic films or plastic laminates and a barrier layer impervious to water vapour and gases in the form of a metal foil are processed into pouches by stamping or cutting and/or folding and sealing. Exemplary for such a composite film is a four layer composite containing one after another e.g. a polyester film, an aluminium foil, an oriented polyamide film and a polypropylene film. The polyester film provides the strength, the polyamide film acts supportively in the composite and the generally relatively thick polypropylene film improves the resistance to penetration and can be sealed. Each of the four layers is joined to the neighbouring layers by means of an adhesive and, in some cases by an additional bonding agent and/or primer.

Manufacturing such a composite is complicated as the various process steps may have to be carried out in different facilities. Depending on the number and type of layers it necessary to employ a corresponding number of passes through the machine. As a result of the many layers of adhesive, delamination may readily occur under the conditions required for sterilisation.

25

The object of the present invention is to propose a composite film which has a simple structure or a structure that can be manufactured by simple technology, can withstand sterilisation conditions and can be easily processed into pouches.

That objective is achieved by way of the invention in that the composite film exhibits a layer structure containing one over the other or one after the other:

- a) a first functional layer containing a plastic film of the polyester, polyamide or poly-olefin type or an extrusion layer of polyolefins or one or more lacquer layers or print and lacquer layers or print layers and
- b) a metal foil and

- c) a second functional layer in the form of a plastic film of the coextrusion coated, coextruded and/or extrusion laminated polyamide/polypropylene film type.

Preferred are sterilisable composite films that exhibit a layer structure containing one after
5 the other:

- a) a plastic film of the polyester type and
b) a metal foil and
c) a plastic film of the coextrusion coated, coextruded and/or extrusion laminated
10 polyamide/polypropylene type of film.

Further preferred sterilisable composite films according to the present invention are such
containing one after the other:

- 15 a) one or more lacquer layers or print and lacquer layers or print layers and
b) a metal foil and
c) a plastic film of the coextrusion coated, coextruded and/or extrusion laminated
polyamide/polypropylene type of film.

- 20 The metal foils may have a thickness e.g. of 5 to 100 μm , usefully from 7 to 25 μm and
preferably from 7 to 15 μm .

- The metal foil may be of steel, iron or copper and is preferably an aluminium foil. The
aluminium foil may be of pure aluminium or usefully an aluminium alloy of the type AlMn,
25 AlFeMn, such as AlFe1.5Mn, AlFeSi or AlFeSiMn, for example having a purity of 97.5%
and higher, preferably 98.5% and higher. The metal foil is preferably an uninterrupted foil,
which should also be texture free and homogeneous.

- The metal foil or aluminium foil is either not pre-treated with a primer or is e.g. pre-treated
30 with a primer on one or both sides.

Suitable primers may e.g. be chosen from the epoxy resin or polyurethane series.

- In the case of plastic films of the polyester type this may be a monofilm or a composite film
35 of two or more layers. The plastic films of the polyester type may be non-stretched or may
be uniaxially or biaxially stretched. The plastic films of the polyester type may have a
thickness e.g. of 8 to 25 μm , usefully 10 to 18 μm and preferably 12 μm .

Examples of polyester type films are polyalkylene-terephthalates or polyalkylene-isophthalates with alkylene groups or radicals with 2 to 10 carbon atoms or alkylene groups with 2 to 10 C atoms that are interrupted e.g. by one or two -O-, such as e.g. polyethylene-terephthalate (PET films), polypropylene-terephthalate, polybutylene-terephthalate (poly-
5 tetramethylene-terephthalate), polydecamethylene-terephthalate, poly-1,4-cyclohexyl-dimethylol-terephthalate or polyethylene-2,6-naphthalene-dicarboxylate or mixed polymers of polyakylene-terephthalate and polyalkylene-isophthalate, where the fraction of isophthalate amounts e.g. to 1 to 10 mol %, mixed polymers and terpolymers, also block polymers and grafted modifications of the above mentioned substances. Other useful polymers are known
10 in the field under the abbreviation PEN.

Other polyesters are copolymers of terephthalic acid and a further polycarboxyl acid with at least one glycol. Useful in that respect are the copolymers of terephthalic acid, ethylene glycol and a further glycol. Preferred are glycol-modified polyesters known in the field as
15 PETG.

Further preferred polyesters are polyalkylene-terephthalates with alkylene groups or radicals with 2 to 4 carbon atoms. Belonging to these polyalkylene-terephthalates are also A-PET, PETP and the so-called PETG or G-PET. Very highly preferred are polyalkylene-terephthal-
20 ate films of the PETP type. The films of polyester may be non-stretched or uniaxially or, preferably, biaxially oriented.

The plastic films of the polyolefin series may be a monofilm or a composite film made up of two or more layers. The plastic films of the polyolefin series may be non-stretched,
25 uniaxially or biaxially oriented. The plastic films of the polyolefin series may exhibit a thickness of 8 to 30 μm , usefully 10 to 23 μm , preferably from 12 to 18 μm .

The extrusion layers of polyolefins may be an extrusion layer or a co-extrusion layer. The weight per unit area of the extrusion layer or co-extrusion layer may be e.g. from 3 to
30 25 g/m^2 , preferably from 10 to 20 g/m^2 .

Examples of polyolefins for the films or extrusion coatings are polyethylenes such as low, medium or high density polyethylenes or linear polyethylenes of low, medium or high density, special preference being given to high density polyethylenes. Further examples are
35 co-polymers or terpolymers of ethylene with acrylic acid (EAA, ethyl acrylic acid), of ethylene acrylic esters such as methyl acrylate (EMA), ethyl acrylate (EEA) or butyl acrylate (EnBA), of ethylene with vinyl acetates (EVA), of ethylene with methacrylic acid (EMMA)

or of ethylene with ethyl acrylate and acrylic acid (EAEAA) or ionomer resins. Further examples of a polyolefin that can be mentioned are polypropylenes. The polypropylene for films or extrusion coatings may be an isotactic, syndiotactic or atactic polypropylene or a mixture thereof. The polypropylene may be amorphous, partially crystalline or highly crystalline. Also block polymers or random copolymers of polypropylene may be employed. The average molar mass may be e.g. from less than 10,000 to 600,000 or higher. Also copolymers, such as ethylene/propylene-block or multiblock-copolymers and poly-blends such as caoutchouc modified polypropylene and of polypropylene may be employed. For example, ethylene/ propylene-block copolymers may contain up to 50 wt.% polyethylenes such as e.g. high density polyethylene (HDPE).

The plastic films of the polyamide type contain e.g. polyamide 6, a homopolymeride of ϵ -caprolactam (polycaprolactam); polyamide 11, polyamide 12, a homopolymeride of ω -laurin-lactam (polylaurinlactam); polyamide 6.6, a homopolymer condensate of hexamethylene-diamine and adipinic acid (poly-hexa-methylene-adipamide); polyamide 6.10, a homopolymer condensate of hexa-methylene-diamine and sebacinic acid (poly-hexa-methylene-seba-camide); polyamide 6.12, a homopolymer condensate of hexa-methylene-diamine and dodecandic acid (poly-hexa-methylene-dodecanamide) or polyamide 6-3-T, a homopolymer condensate of trimethyl-hexamethylene-diamine and terephthalic acid (poly-trimethyl-hexa-methylene-terephthalamide, and mixtures thereof. Preferred are polycaprolactams. Coextruded layers of polyamides are to advantage non-stretched. The films of polyamides may be non- stretched or uniaxially or biaxially oriented. The plastic films of the polyamide type may be e.g. 8 to 50 μm thick, usefully 10 to 40 μm , preferably 15 to 25 μm thick.

The plastic layers of coextrusion coated, coextruded or extrusion laminated polyamide/polypropylene is e.g. a prefabricated unit containing the two polymers. The plastic film of coextruded polyamide/polypropylene may e.g. have a thickness of 30 to 125 μm , usefully 50 to 90 μm and preferably 60 to 80 μm . The thickness of the polyamide layer in the coextrusion coated, coextruded or extrusion laminated polyamide/polypropylene film may make up e.g. 5 to 50 % of the total thickness of the coextrusion coated, coextruded or extrusion laminated film, usefully 10 to 30 % and preferably 15 to 25 %.

A useful version is such that the plastic layer, layer c), exhibits a layer arrangement comprising superimposed coextrusion coated, coextruded and/or extrusion laminated first bonding agent/ polyamide/ bonding agent/ polypropylene, where layer c) lies on the free side of the first bonding agent layer on the metal foil, layer b).

In a preferred version plastic layer, layer c), exhibits a layer arrangement comprising superimposed, coextruded bonding agent and polyamide, extruded bonding agent and laminated polypropylene film, where layer c) lies over the free side of the coextruded bonding agent layer on the metal foil, layer b).

5

In a another preferred version plastic layer, layer c), exhibits a superimposed layer arrangement comprising laminate adhesive and laminate bonded, a polyamide/bonding agent/ polypropylene film, where the layer c) lies on the laminate adhesive layer on the metal foil, layer b).

10

In another preferred version the plastic layer, layer c), exhibits a layer arrangement comprising, lying one over another, extruded first bonding agent, laminate bonded polyamide film, extruded bonding agent, laminate bonded polypropylene film, where the first extruded bonding agent layer lies on the metal foil, layer b).

15

In a further version the plastic layer, layer c), exhibits a layer arrangement comprising, superimposed on each other, coextrusion coated first bonding agent, polyamide, bonding agent and polypropylene, where the first layer of bonding agent lies on the metal foil, layer b).

20

For example, the plastic layer, layer c) may exhibit a layer arrangement of, superimposed, coextrusion coated, coextruded and/or extrusion laminated bonding agent of thickness 3 to 15 μm / polyamide of thickness 10 to 40 μm / bonding agent of thickness 3 to 15 μm / polypropylene of thickness 30 to 70 μm .

25

The series of polyamide/polypropylene films may include other variants which result in sterilisable composite films according to the present invention, in which the composite film exhibits a layer structure containing superimposed one on top of the other or in sequence:

30

a) a first functional layer containing a plastic film of the following type viz., polyesters, polyamides or polyolefins or an extrusion layer of polyolefins or one or more layers of lacquer or print and lacquer layers or print layers and

b) a metal foil and

c) a plastic layer having a layer arrangement of coextrusion coated, coextruded and/or extrusion laminated polypropylene/polyamide/polypropylene.

35

Useful as layer c) is a plastic film having a series of layers of superimposed coextrusion coated or coextruded and/or extrusion laminated polypropylene/ bonding agent/ polyamide/ bonding agent/ polypropylene.

- 5 Preferred as layer c) is an arrangement of layers of superimposed laminate adhesive and laminate bonded a film of polypropylene/ bonding agent/ polyamide/ bonding agent/ polypropylene film, where layer c) lies on the laminate adhesive on the metal foil, layer b).

- Also preferred as layer c) is an arrangement of layers, superimposed on each other, of
10 coextrusion coated polypropylene, bonding agent, polyamide, bonding agent and polypropylene, where the first layer of polypropylene lies on the metal foil, layer b).

- Preferred as layer c) is a plastic layer having an arrangement of layers comprising coextrusion coated , coextruded and/or extrusion laminated 10 - 20 μm thick polypropylene/
15 3 - 15 μm thick bonding agent/ 10 - 40 μm thick polyamide/ 3 - 15 μm thick bonding agent/ 30 - 70 μm thick polypropylene.

- A bonding agent which is e.g. 3 - 15 μm thick may be provided between the plastic layer, layer c) and the metal foil, layer b). Instead of a bonding agent, for example if a
20 prefabricated layer c) or a layer of polyamide or polypropylene is provided, layer c) in the form of a whole layer or the film belonging to layer c), may be laminate bonded to the metal foil, layer b), using a laminate adhesive.

- The films of coextruded polyamide/polypropylene may be non stretched or may be
25 uniaxially or biaxially oriented.

Examples of polypropylenes and polyamides in the plastic film of coextruded polyamide/ polypropylene may be taken from the list presented above.

- 30 In the case of layers of e.g. coextruded polyamide/polypropylene, bonding is usually onto the inside i.e. the side facing the contents of a packaging container made from the composite film according to the invention. In that sense the polyamide layer faces the metal foil or is laminated onto the metal foil.

- 35 The present composite films may be sealed via the outer lying polyamide layer

The composite films here may be sealed by means of the outer lying polypropylene layer of the co-extruded film.

In some cases, in order to control the sealing properties further, one may deposit on the
5 polypropylene, and on the other free side of the composite film - for example the lacquer coating or the polyester, polyamide or polyolefin film or the polyolefin layer - sealing layers such as sealing films, hot sealing lacquers or sealing lacquers e.g. on the basis of polyolefins such as polyethylenes, copolymers and terpolymers of ethylene with acrylic acid (EAA, ethyl acrylic acid) of ethylene with acrylic esters, such as methyl acrylate (EMA), ethyl
10 acrylate (EEA) or butyl acrylate (EnBA), of ethylene with vinylacetates (EVA), of ethylene with methylacrylic acid (EMMA), of ethylene with ethyl acrylate and acrylic acid (EAEAA) or ionomer resins, alone or in mixture form, polypropylenes, and mixtures thereof, also poly-acrylates, PVC resins, polyvinyliden chlorides, EVA, polyalkylene-terephthalates, in particular of the A-PET type etc.

15

The free side, in particular the of the polyester film, may be coated with EVA (ethylene/vinyl alcohol copolymer) or with an amorphous polyester sealing layer of the A-PET type. Especially preferred are polypropylenes and polyethylene-terephthalates

20 The individual layers i.e. the first functional layer and thereby in particular the plastic film a) from the series of polyester films, or polyamide films, or polyolefin films or polyolefin layers facing the metal foil and/or the second functional layer (layer c)) facing the metal foil and in some cases the individual layers of the functional layer, layer c), among themselves and any sealing films on the free side of the composite film may be joined to each other by
25 means of a bonding agent and/or laminate adhesive.

Suitable laminate adhesives may be solvent-containing or solvent-free and water-containing. Examples of laminate adhesives are solvent-containing, solvent-free or aqueous acrylic adhesives or polyurethane adhesive systems. However, also adhesives that harden under the
30 influence of radiated energy (e.g. ultra violet, electron beam radiation) may be employed. In view of the preferred application of the composite material in the field of foodstuff packaging, adhesive systems that are totally acceptable from the physiological standpoint are to be given preference. Aliphatic adhesive systems are particularly suitable.

35 For example, products based on maleic acid and modified polypropylene or polyethylene may be employed as bonding agents.

The laminate adhesive may be deposited e.g. by casting, wiping, spraying, application from smooth rolls etc.

5 The laminate adhesive and the bonding agent may be employed in amounts e.g. of 0.5 to 10 g/m², preferably 1 to 8 g/m² and in particular 2 to 6 g/m². The laminate adhesives and the bonding agent may also be employed in amounts resulting in layers having a thickness e.g. of 0.1 µm, preferably 3.0 µm, up to 15 µm.

10 The surface of the metal foil may provide better adhesion properties for the adhesive or lacquer or for an extrusion layer by an appropriate pre-treatment (e.g. brushing, chromate treatment, ionising treatment, or treatment with ozone, flame or plasma). In order to assist and improve the bonding of the lacquer, bonding agents or laminate adhesives between the plastic films or the bonding of extruded layers, it is often useful to provide the film with adequate surface tension on the side facing the adhesive or the extrudate. The increase in
15 surface tension may be achieved advantageously by an ionising, ozone, plasma, flame or corona pre-treatment.

It may also be advantageous to join the first and/or second functional layer to the metal foil, without laminate adhesive and/or bonding agent, only under the action of pressure and heat.
20

In one possible version e.g. the plastic film a) of the polyester or polyamide type may exhibit a counter image on the side facing the metal foil. A counter image is particularly suitable for transparent and translucent films. It is also possible to provide the polyester, polyamide or polyolefin film, or extrusion layer of polyolefins with a printed image on the outside and if
25 desired to cover the image with a lacquer coating.

The composite films may exhibit, as a first functional layer a), one or more lacquer coatings or lacquer coatings and print layers on the outside or facing the outside viz., with respect to the container made from the film according to the invention. Print layers include in
30 particular material deposited by a printing process over part or the whole of the surface.

Protective coatings, pre-coatings, print materials and if necessary covering layers that come into question are e.g.:

35 Systems based on solvents (1) or systems with water as solvent (2) or systems that are dried or hardened by ultra violet or another form of radiation (3). The lacquer pre-coatings or covering layers (1) dissolved in solvents may be lacquer coatings with binding agent based

- on polyacrylate, polymethylacrylate, polyester, epoxide, cellulose nitrate, polyvinyl-chloride-acetate, polyvinylbutyral or mixtures of these binding agents, hardened with melaminic resins, ureic resins, polyisocyanates polyazirides or mixtures of these, if desired used along with acids, amines, calcium compounds, tin compounds as hardening
- 5 accelerators and silanes, titanium or zirconium chelates as additives to promote bonding.

The corresponding printing materials may be made up in a similar manner, or they are often made up using non-hardening resins e.g. polyvinylbutyral or cellulose nitrate.

- 10 Aqueous systems (2) contain additionally tensides in order to ensure solubility. Use may be made of printing materials and covering layers (3) hardening under the influence of ultra-violet and other forms of radiation may be radical cross-linking printing materials and covering lacquer layers based on acrylates on conventional pre-coatings, as described above, print-ing materials that cross-link by a cationic mechanism, as described above, print pre-
- 15 coating lacquers or UV- or radiation-hardening lacquer pre-coatings that cross-link by a cationic mechanism.

- The lacquer layer or layers may be deposited by casting, spraying, wiping, deposition from a smooth roll etc., for example in each case in an amount of 0.5 to 10 g/m², in particular from
- 20 1.0 to 5 g/m².

- If in addition to the lacquer coating or coatings or extrusion coatings, print layers or print layers alone are employed, then the printing of the composite film may be carried out using all known printing methods e.g. typographic, offset, flexo, screen, helio, and copper gravure
- 25 printing. The choice of printing method to be employed depends on the desired quality of print, the prevailing technical aspects and on the number to be printed. It is possible to deposit single or multi-coloured layers of print on part or the whole of the surface area. Preferred is flexo-printing (also known as aniline or offset printing) and screen printing such as copper gravure printing, or helio-printing. The printing lies on the outward facing side of
- 30 the composite material and e.g. in addition may have an overcoat of at least one further lacquer coating. For example, one, two, three or more lacquer coatings may be employed, the first lacquer coating lying on the metal foil or the pre-treated metal foil. In another version the printing may be deposited directly on the metal foil and if desired be covered by one, two, three or more lacquer layers. The last mentioned lacquer layers are, advantage-
- 35 ously, transparent or translucent and act as protection for the printing. The printing may also be performed in several steps and at least one print layer covers the whole surface with the result that this total surface print layer or layers acts/act as a protective layer or layers. In

another version the metal foil or pre-treated metal foil may have an overcoat of one or more lacquer layers. On top of this lacquer layer or layers comes whole area or partial area single or multi-coloured printing, which in some cases may be covered over with one or more lacquer layers, in particular transparent or translucent lacquer layers.

5

If desired the inner side of the composite may also be provided with a lacquer and/or printing.

The production of the composite film according to the invention may take place in a simple manner and in few process steps. The second functional layer c) of polypropylene/ bonding agent/ polyamide is produced e.g. by co-extrusion or extrusion laminating and prepared for further processing. The first functional layer a) is deposited onto one side of the metal foil in the form of a polyester film e.g. laminate bonded using a laminate adhesive, or as an extrusion coating, or the lacquer layer or layers, the print layer or layers, or lacquer and print layers are deposited in a single or multi-stage lacquering process and/or printing process, or as extrusion coating and overlying print layers. Thereafter the second functional layer c) can be laminate bonded onto the side of the metal foil that is still free. The sequence in the laminate coating process or lacquer coating and printing may be performed in an analogous manner also in a different order.

20

Layer c) in the form of a plastic film with the structure polyamide/ bonding agent/ polypropylene can be manufactured e.g. by coextrusion such as 3 layer blow-extrusion or 3 times extrusion laminating or by coextrusion coating. Such a film may be deposited on one side of the metal foil, layer b) e.g. using a bonding agent or, in particular, using a laminate adhesive.

25 It is also possible to deposit layer c) directly onto the metal foil by coextrusion coating.

Layer c) in the form of a plastic film with the structure polypropylene/ bonding agent/ poly-polyamide/ bonding agent/ polypropylene can be manufactured e.g. by coextrusion such as 5 layer blow-extrusion or multiple e.g. 5 times extrusion laminating or by coextrusion coating.

30 Such a film may be deposited on one side of the metal foil, layer b) e.g. using a bonding agent or, in particular, using a laminate adhesive. It is also possible to deposit layer c) directly onto the metal foil by coextrusion coating.

Another manner of manufacture may be such that e.g. a first coextrudate of bonding agent and polyamide is deposited on one side of the metal foil and a second coextrudate of bonding agent and polypropylene is deposited on the free side of the polyamide, whereby the poly-propylene then forms the free outer side.

35

Yet another method of manufacture is such that e.g. a first coextrudate of bonding agent and polyamide is deposited on one side of the metal foil, layer b), and, a polypropylene film is deposited as the outer lying layer on the free side of the polyamide by extrusion laminating a bonding agent.

5

Another method of manufacture is such that e.g. a first bonding agent, the polyamide, is deposited on one side of the metal foil, layer b), on the free side of the polyamide a second bonding agent and finally the propylene deposited one after the other by casting or extrusion, whereby the propylene forms the free outer side..

10

The present invention also relates to pouch type forms of packaging of a sterilisable composite film according to the present invention. Pouch type forms of packaging may be made e.g. from a piece of composite material by folding and sealing, or from two side pieces of the said composite material by – if desired folding and – sealing, or from a plurality of side
15 pieces of the composite material by – if desired folding and – sealing. Typical pouches are flat pouches, self-standing pouches, pouches sealed at the edges, pouches of given volume, self-standing pouches of given volume, side-seam flat pouches, rigid-base pouches, or bags such as welded flat or folded bags etc. The pouch-type forms of packaging may be employed for contents such a foodstuffs for human consumption or for animals or for semi-luxury
20 items all of which may be in lump form, or in pulpy, pasty, semi-fluid or fluid form. Other examples of applications for such pouches are cosmetics or substances for personal hygiene in pasty to fluid form. Other examples are pharmaceutical products or preparations for remedial pur-poses. The composite films according to the present invention can be sterilised without suffering delamination of the individual layers or loss of strength e.g. by a thermal
25 treatment at 110 to 130°C, preferably 121°C, for 10 to 60 minutes, preferably 30 minutes.

Figures 1 to 3 show schematically by way of example the make up of the composite film according to the invention.

30 The composite film shown in figure 1 features a metal foil 1. Laminate coated onto one side of the metal foil 1, by means of the laminate adhesive 7, is the first functional layer e.g. in the form of a PETP film 5. By way of example the PETP film 5 bears a counter-print 6. On the other side of the metal foil 1 is the second functional layer 2 in the form of a co-extrusion film comprising polyamide 3 and polypropylene 4, laminate bonded to the metal
35 foil 1 by means of a laminate adhesive 8. When the composite film is in use, the polypropylene 4 of the co-extruded film 2 faces the contents of the packaging made from the composite film.

The composite film shown in figure 2 features a metal foil 1. On one side of the metal foil 1 is the first functional layer in the form of print and lacquer layers. Directly on the metal foil 1 is a pre-coating of lacquer 9, on top of this the surface print 10 and finally the protective
5 lacquer 11. On the other side of the metal foil 1 is the second functional layer 2 in the form of a co-extrusion film of polyamide 3 and polypropylene 4 laminate bonded to the foil 1 by means of a laminate adhesive 8. Also in this application of the composite film the polypropylene 4 of the co-extrudate 2 faces the contents of the packaging made from the composite film.

10

The composite film shown in figure 3 exhibits a metal foil 1. The first functional layer in the form e.g. of a PETP film 5 is laminate bonded to one side of the metal foil 1 by means of the laminating adhesive 7.

15 By way of example the PETP film 5 bears a counter-print 6. On the other side of the metal foil 1 is the second functional layer 2 in the form of a plastic film 12 with a layer arrangement of coextruded and/or extrusion laminated polypropylene 13/ bonding agent 16/ polyamide 15/ bonding agent 17/ polypropylene 14 laminate bonded by way of a laminate adhesive 8.

20

25

30

35

Claims

- 5 1. Sterilisable composite film containing a barrier layer that is impermeable to water vapour and gases in the form of a metal foil, and on both sides of the barrier layer at least one functional layer,
- characterised in that,
- 10 the composite film exhibits a layer structure containing one on top of the other:
- a) a first functional layer containing a plastic film of the polyester, polyamide or poly-olefin type or an extrusion layer of polyolefins or one or more lacquer layers or print and lacquer layers or print layers and
 - 15 b) a metal foil and
 - c) a second functional layer in the form of a plastic film of the coextrusion coated, coextruded and/or extrusion laminated polyamide/polypropylene film type.
2. Sterilisable composite film according to claim 1, characterised in that the plastic
- 20 layer,
- layer c), exhibits a layer arrangement comprising coextrusion coated, coextruded and/or extrusion laminated bonding agent/ polyamide/ bonding agent/ polypropylene, where layer c) lies over the free surface of the first layer of bonding agent on the metal foil, layer b)
- 25 3. Sterilisable composite film according to claim 2, characterised in that the plastic layer, layer c), exhibits a layer type structure with one layer superimposed over the other, comprising coextruded bonding agent and polyamide and extruded bonding agent and laminate bonded polypropylene film, whereby layer c) lies on the free side
- 30 of the coextruded bonding agent layer on the metal foil, layer b).
4. Sterilisable composite film according to claim 1, characterised in that the plastic layer, layer c), exhibits a layer type structure with one layer superimposed over the other, comprising laminate adhesive and laminate bonded a polyamide/ bonding
- 35 agent/ poly-propylene film, whereby the laminate adhesive layer lies on the metal foil, layer b).

5. Sterilisable composite film according to claim 2, characterised in that the plastic layer, layer c), exhibits a layer type structure with one layer superimposed over the other, comprising bonding agent, laminate bonded polyamide film, extruded bonding agent and laminate bonded polypropylene film, whereby the first extruded bonding agent layer lies on the metal foil, layer b).
6. Sterilisable composite film according to claim 2, characterised in that the plastic layer, layer c) exhibits a layer type structure with one layer superimposed over the other, comprising coextrusion coated bonding agent, polyamide, bonding agent and poly-propylene, whereby the first bonding agent layer lies on the metal foil, layer b).
7. Sterilisable composite film according to claim 2, characterised in that the plastic layer, layer c) exhibits a layer type structure with one layer superimposed over the other, comprising coextrusion, coextruded and/or extrusion laminated bonding agent with a thickness of 3 to 15 μm / polyamide with a thickness of 10 to 40 μm / bonding agent with a thickness of 3 to 15 μm / polypropylene with a thickness of 30 to 70 μm .
8. Sterilisable composite film according to claim 1, characterised in that the composite film exhibits a layer type structure containing in sequence:
- a) a first functional layer containing a plastic film of the polyester, polyamide or poly-olefin type or an extrusion layer of polyolefins or one or more lacquer layers or print and lacquer layers or print layers and
 - b) a metal foil and
 - c) a plastic layer having a layer type of structure comprising coextrusion coated, coextruded and/or extrusion laminated polypropylene/ polyamide/ polypropylene.
9. Sterilisable composite film according to claim 8, characterised in that the, layer c) is a plastic film exhibiting a layer type structure comprising coextrusion coated, co-extruded and/or extrusion laminated polypropylene/ bonding agent/ polyamide/ bonding agent/ polypropylene.
10. Sterilisable composite film according to claim 8, characterised in that the plastic layer, layer c) exhibits a layer type structure with one layer superimposed over the other, comprising laminate adhesive and laminate bonded a film of polypropylene/ bonding agent/ polyamide/ bonding agent/ polypropylene, whereby layer c) lies on the laminate adhesive layer on the metal foil, layer b).

11. Sterilisable composite film according to claim 8, characterised in that the plastic layer, layer c) exhibits a layer type structure with one layer superimposed over the other, comprising coextrusion coated polypropylene, bonding agent, polyamide, bonding agent and polypropylene, whereby the first polypropylene layer lies on the metal foil, layer b).
12. Sterilisable composite film according to claim 8, characterised in that layer c) is a plastic layer with a layer structure of coextrusion coated or coextruded and/or extrusion laminated polypropylene with a thickness of 10 to 20 μm / bonding agent with a thickness of 3 to 15 μm / polyamide with a thickness of 10 to 40 μm / bonding agent with a thickness of 3 to 15 μm / propylene with a thickness of 30 to 70 μm .
13. Sterilisable composite film according to claim 1, characterised in that between the plastic layer, layer c), and the metal foil, layer b), a laminate adhesive is provided in an amount from 0.5 to 10 g/m^2 , preferably 1 to 6 g/m^2 , or a bonding agent, preferably with a thickness of 0.5 to 15 μm , preferably 3 to 15 μm .
14. Pouch type of packaging made from a sterilisable composite film according to claim 1.

5 Abstract

Sterilisable composite film for manufacturing pouch type forms of packaging and the like for e.g. liquid, pasty or solid foodstuffs. The sterilisable composite films according to the present invention contain a barrier layer that is impermeable to water vapour and gases in the form of a metal foil. On both sides of the barrier layer is at least one functional layer. The following layers are arranged on top of each other in the composite film:

- a) a first functional layer containing a plastic film of the polyamide or polyolefin type or an extrusion layer of polyolefins or one or more lacquer layers or print and lacquer layers or print layers and
- b) a metal foil and
- c) a second functional layer in the form of a plastic film of coextrusion coated, co-extruded or extrusion laminated polyamide/ polypropylene type layers, such as e.g. a film containing polyamide/ polypropylene layers or containing polypropylene/ polyamide/ poly-propylene layers .

(Fig. 1)

Fig. 1

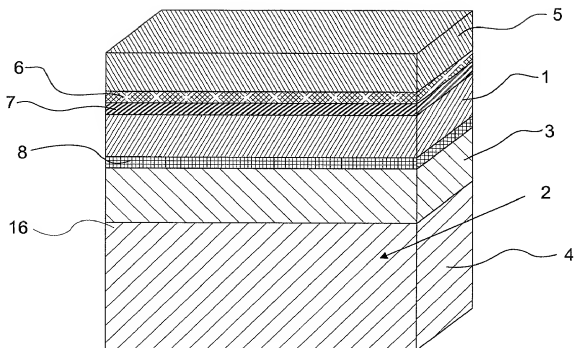


Fig. 2


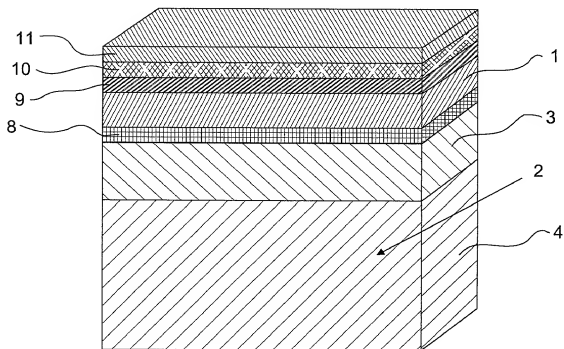


Fig. 3

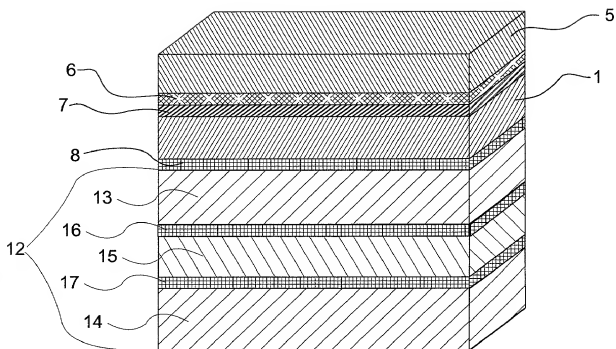

Type a plus sign (+) inside this box →

0010/PTO
Rev. 6/95U.S. Department of Commerce
Patent and Trademark Office**DECLARATION**
☒ Declaration Submitted with Initial Filing
 OR
 ☐ Declaration Submitted After Initial Filing

Attorney Docket Number

First Named Inventor

COMPLETE IF KNOWN

Application Number

Filing Date

Group Art Unit

Examiner Name

As a below named inventor, I hereby declare that

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Sterilisable Composite Film

the specification of which



is attached hereto



OR was filed on (MM/DD/YYYY) as PCT International Application

Number and was amended on (MM/DD/YYYY) (if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37 Code of Federal Regulations, § 56.

I hereby claim foreign priority benefits under Title 35, United States Code § 119 (a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

Priority Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Copy Attached? YES NO
1114/99	Switzerland	06.15.1999	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>



Additional foreign application numbers are listed on a supplemental priority sheet attached hereto.

I hereby claim the benefit under Title 35, United States Code § 119(e) of any United States provisional application(s) listed below:

Application Number(s)

Filing Date (MM/DD/YYYY)



Additional provisional application numbers are listed on a supplemental priority sheet attached hereto.

DECLARATION

Page 2

I hereby claim the benefit under Title 35, United States Code §120 of any United States application(s), or §365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of Title 35, United States Code §112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations 1.56 which became available between the filing date of the prior application and the national or PCT filing date of this application.

U.S. Parent Application Number	PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (if applicable)

☐ Additional U.S. or PCT international application numbers are listed on a supplemental priority sheet attached hereto

As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith.

Firm Name **Fisher, Christen & Sabol**

Payor Number (if applicable)

Name	Registration Number	Name	Registration Number
Virgil H. Marsh	23,083		
Kara M. Armstrong	38,234		


☐ Additional attorney(s) and/or agent(s) named on a supplemental sheet attached hereto

<input checked="" type="checkbox"/> Please direct all correspondence to		Name		Virgil H. Marsh	
Address Fisher, Christen & Sabol					
Address Suite 1401, 1725 K Street, N.W.					
City		Washington		State D.C.	
Country		USA		Zip 20006	
Telephone		(202)659-2000		Fax (202)659-2015	

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Name of Sole or First Inventor:

☐ A petition has been filed for this unsigned inventor

Given Name	Wilfried	Middle Initial		Family Name	Jud	Suffix	
Inventor's Signature						Date	02/04/00
Residence: City	Singen	State		Country	Germany	Citizenship	German

Post Office Address:
Conradin-Kreutzer-Str. 2, D-78224 Singen, Germany

City	Singen	State		Zip	78224	Country	Germany	Applicant Authority	
------	--------	-------	--	-----	-------	---------	---------	---------------------	--

☒ Additional inventors are being named on supplemental sheet(s) attached hereto

Type a plus sign (+) inside this box →



DECLARATION				ADDITIONAL INVENTOR(S) Supplemental Sheet			
Name of Additional Joint Inventor, if any:				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name	Hans-Rudolf	Middle Initial		Family Name	Nägeli	Suffix	
Inventor's Signature <i>Hans R. Nägeli</i>						Date	02/04/00
Residence: City	Neuhausen	State		Country	Switzerland	Citizenship	Swiss
Post Office Address:							
Hofluhstr. 10, CH-8212 Neuhausen, Switzerland							
City	Neuhausen	State		Zip	8212	Country	Switzerl.
Name of Additional Joint Inventor, if any:				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name		Middle Initial		Family Name		Suffix	
Inventor's Signature						Date	
Residence: City		State		Country		Citizenship	
Post Office Address:							
City		State		Zip		Country	
Name of Additional Joint Inventor, if any:				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name		Middle Initial		Family Name		Suffix	
Inventor's Signature						Date	
Residence: City		State		Country		Citizenship	
Post Office Address:							
City		State		Zip		Country	
Name of Additional Joint Inventor, if any:				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name		Middle Initial		Family Name		Suffix	
Inventor's Signature						Date	
Residence: City		State		Country		Citizenship	
Post Office Address:							
City		State		Zip		Country	
Name of Additional Joint Inventor, if any:				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name		Middle Initial		Family Name		Suffix	
Inventor's Signature						Date	
Residence: City		State		Country		Citizenship	
Post Office Address:							
City		State		Zip		Country	
Name of Additional Joint Inventor, if any:				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name		Middle Initial		Family Name		Suffix	
Inventor's Signature						Date	
Residence: City		State		Country		Citizenship	
Post Office Address:							
City		State		Zip		Country	
Name of Additional Joint Inventor, if any:				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name		Middle Initial		Family Name		Suffix	
Inventor's Signature						Date	
Residence: City		State		Country		Citizenship	
Post Office Address:							
City		State		Zip		Country	
Name of Additional Joint Inventor, if any:				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name		Middle Initial		Family Name		Suffix	
Inventor's Signature						Date	
Residence: City		State		Country		Citizenship	
Post Office Address:							
City		State		Zip		Country	